

The Targus logo, featuring the word "TARGUS" in a bold, italicized, sans-serif font.

Bluetooth Mini Mouse

The Targus logo, featuring the word "TARGUS" in a bold, italicized, sans-serif font.

Making Your Mobile Life Easier.®

Visit our Web site at: www.targus.com
Features and specifications are subject to change without notice.
© 2004 Targus Group International and Targus Inc.
AMB01US / 400-0173-001B

INSTALL GUIDE

Making Your Mobile Life Easier.®

BRUSSELS HANNOVER BARCELONA TOKYO MILANO AMSTERDAM SINGAPORE LONDON PARIS NEW YORK LOS ANGELES TORONTO HONG KONG SYDNEY



PMS Black
15%



PMS Black
100%

TARGUS BLUETOOTH MINI MOUSE WITH BLUETOOTH ADAPTER

Introduction

Congratulations on your purchase of a Targus Bluetooth Mouse. The Bluetooth software included offers service to other Bluetooth devices from your computer, such as: PIM Synchronization, PIM Item Transfers, File Transfers, Network Access, Dial-up Networking and Bluetooth Serial Port.

This user's guide describes how to connect the mouse adapter to your computer, install default software drivers and set up the radio link.

In addition to this user's guide this package contains:

- Targus Bluetooth Mini Mouse
- Bluetooth USB Adapter
- USB Extension cable
- CD-ROM
- 2 AAA batteries
- Carrying Pouch

System Requirements

To use the mouse, your computer must meet the following requirements:

Hardware

- PC with a Pentium® processor or equivalent
- USB interface

Operating System

- Windows® 2000 or XP

Installing the Software



CAUTION: Do not plug in the USB adapter until prompted by the software.

- 1 Insert the software CD-ROM into your computer's CD-ROM drive.

The "InstallShield Wizard" screen appears.

If setup does not begin automatically, click **Start, Run**, then enter **D:\Setup.exe** (where D: is the path of your disc drive) and then click **OK**.

- 2 Click **Next**.
- 3 The 'License Agreement' screen appears.
- 4 Click 'I accept the terms in the License Agreement'.
- 5 Click **Next**.

Follow the on-screen instructions.

The following screen will appear to prompt you to plug in the USB adapter.



6 Plug the USB adapter into an available USB slot on your computer.

7 Click OK.

The new hardware will be found and the installation will finish.

8 You will be prompted to Restart your computer to complete the installation.




NOTE: FOR A COMPLETE USER'S GUIDE, PLEASE REFER TO THE MANUAL LOCATED ON THE CD-ROM INCLUDED IN THIS PACKAGE.

Using the Bluetooth Mouse

Installing the Batteries

- 1 Remove the battery cover from the top of the mouse by pressing the release latch on the bottom of the mouse.

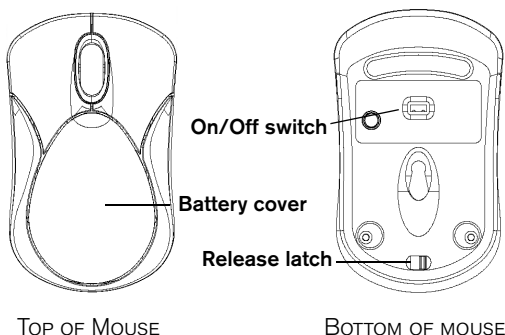


- 2 Insert the supplied batteries, making sure that the positive (+) and negative (-) ends of each battery match the polarity indicators inside the battery housing.



WARNINGS: WHEN REPLACING THE BATTERIES, YOU MAY USE ALKALINE OR OTHER HEAVY-DUTY NiMH BATTERIES. NEVER USE AN ALKALINE WITH A NiMH BATTERY IN A DEVICE.

AVOID MIXING NEW AND USED BATTERIES IN A DEVICE.

- 3 Snap the battery cover back into position.
- 4 Turn on the mouse by sliding the on/off switch on the bottom of the mouse to the "on" position.

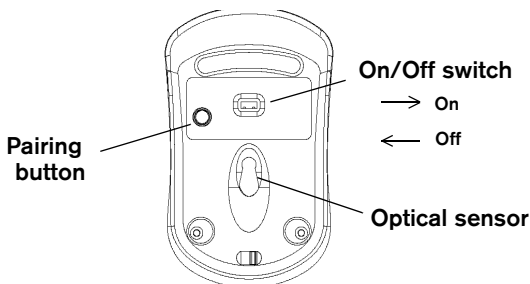

Initial Configuration

Before you can begin using Bluetooth on your computer and with other Bluetooth devices, you must perform some initial setup.



NOTE: FOR A COMPLETE USER'S GUIDE WITH DETAILED INSTRUCTIONS ON CONFIGURING BLUETOOTH DEVICES, PLEASE REFER TO THE MANUAL LOCATED ON THE CD-ROM INCLUDED IN THIS PACKAGE.

Accessing the Bluetooth Configuration Panel

The Bluetooth Configuration Panel provides access to settings for Bluetooth services, client applications, hardware, security, discovery, accessibility, default paths, event notification and other Bluetooth related items.

Open the configuration panel one of two ways:

- From the Windows Control Panel, select Bluetooth Configuration; or
- In the Windows System Tray, right-click the Bluetooth icon, and select Advanced Configuration from the shortcut menu.

The following screen will appear:



The Configuration Wizard will take you through the initial setup of your computer and configure a basic Bluetooth environment.

You can select the locations you want the Bluetooth icon to appear.



Next you will need to select a name for your computer and indicate what type it is:

General

Device Name and Type:
You must select a name for this computer and indicate what type of computer it is.

Targus Bluetooth Adapter 3.0.1.901

Identity

Enter a unique name for this computer. This name will be displayed to other Bluetooth devices if this computer is configured to allow itself to be discovered.

Select a computer type from the drop-down menu. This selection determines the icon that represents this computer on remote devices.

Computer name:

Computer type:

< Back Next > Cancel

To configure the Bluetooth services that your computer will offer to other Bluetooth devices, click Next.



Follow on-screen instructions to complete your settings.




NOTE: FOR A COMPLETE USER'S GUIDE WITH DETAILED INSTRUCTIONS ON CONFIGURING BLUETOOTH DEVICES, PLEASE REFER TO THE MANUAL LOCATED ON THE CD-ROM INCLUDED IN THIS PACKAGE.

Pairing Devices

Pairing allows you to avoid entering access information each time a connection is attempted. Paired devices share a unique link key, which they exchange each time they connect.

After the software is installed, you must pair the USB adapter with the bluetooth mouse **BEFORE** you can use the mouse. To do this:

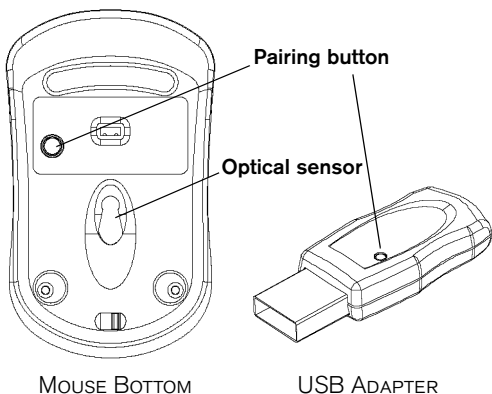

- 1 While the USB adapter is connected to your computer, press and hold the pairing button located on the bottom of the USB adapter until the following screen appears:



- 2 While the Wizard searches for the mouse, press and hold the pairing button on the bottom of the mouse until it is identified. The optical sensor will illuminate red and the following dialog box will appear:



Use the Bluetooth mouse to click the “Click here” button to confirm the connection.

You are now ready to use the mouse.



NOTES: PAIRED DEVICES ARE ALWAYS DISPLAYED IN MY BLUETOOTH PLACES, EVEN IF THE REMOTE DEVICE IS OUT OF RANGE OR NOT POWERED UP.

FOR A COMPLETE USER'S GUIDE, PLEASE REFER TO THE MANUAL LOCATED ON THE CD-ROM INCLUDED IN THIS PACKAGE.

Basic Operations

Bluetooth tray

The Bluetooth tray resides in the Windows system tray, which is normally located in the lower-right corner of the screen. The Bluetooth tray provides fast access to most Bluetooth operations.

From the Bluetooth tray you can:

- Access My Bluetooth Places:
 - › Double-click the Bluetooth icon, or right-click the Bluetooth icon and then select Explore My Bluetooth Places.
- Access the Bluetooth Setup Wizard to help you:
 - › Configure how this computer accesses a service on another Bluetooth device.
 - › Locate remote Bluetooth devices.
 - › Configure the way that this computer provides services to remote Bluetooth devices .

- › Set the name and type of this Bluetooth device, e.g., “John's PC” and “Desktop.”
- Access the Bluetooth Configuration Panel:
 - › Right-click the Bluetooth icon, and then select Advanced Configuration.
- Access the Quick Connect option:
 - › Right-click the Bluetooth icon, select Quick Connect, and then select the type of service to which you wish to connect.
- Start/Stop Bluetooth on this computer.



NOTE: FOR A COMPLETE USER'S GUIDE WITH DETAILED INSTRUCTIONS ON CONFIGURING BLUETOOTH DEVICES, PLEASE REFER TO THE GUIDE LOCATED ON THE CD-ROM.

Bluetooth Connection Status

The Bluetooth Connection Status dialog box displays information about the state of a connection and provides a means to disconnect an active connection.

To display the Connection Status dialog box: in My Bluetooth Places, from the Folders pane, select a device, and then, in the right pane of My Bluetooth Places, right-

click a service name and select **Status** from the shortcut menu.



SAMPLE CONNECTION STATUS DIALOG BOX

To Pair with another device

In the Folders pane of My Bluetooth Places, right-click a device, select **Pair Device** from the shortcut menu, and then follow the on-screen instructions.

Remove Pairing

In the Folders pane of My Bluetooth Places, right-click a paired device and select **Unpair Device** from the shortcut menu.

Start or Stop Bluetooth

To start Bluetooth

In the Windows system tray, right-click the Bluetooth icon and select Start the Bluetooth Device. The Bluetooth icon is blue in color with a white insert when the Bluetooth software is running.

To stop Bluetooth

In the Windows system tray, right-click the Bluetooth icon and select Stop the Bluetooth Device. The Bluetooth icon is blue in color with a red insert when Bluetooth is stopped.

Mouse Power Management

To power the mouse on and off, slide the on/off switch at the bottom of the mouse to the desired position.

When power is on, the mouse goes into "sleep mode" after 20 minutes of inactivity. To activate the mouse, click any button.

To save battery power, turn off the mouse while traveling or while not in use.

Operating Hints

For optimal performance and RF reception:

- Avoid using the mouse on a metal surface. Metals, such as iron, aluminum or copper, shield the radio frequency transmission and may slow down the mouse's response time or cause the mouse to fail temporarily.

- The mouse will enter a suspend mode at the same time your computer does. To activate the mouse, press any key on your keyboard.
- If your computer has a metal case that contains aluminum or magnesium, use the mouse to the side. The display panel may interfere with the radio frequency signal if you use the mouse directly in front of the computer.
- Never use the mouse on a glass or mirrored surface as these surfaces will cause the mouse to fail temporarily.
- To maximize battery life, use the mouse on a white, or light colored surface. Dark surfaces cause the mouse's light emitter diode (LED) light to glow brighter, which causes the battery to discharge more rapidly.

Specifications

Bluetooth Specification	1.1 and 1.2 compliant
Resolution	800 DPI
Working range	Up to 33 feet (10 m)
RF transmit power	0 dBm
Operating Voltage	32mA
Batteries	2 AAA Alkaline
Operating Current	5 V
Standby Current	6~22mA
Sleep Mode Current	0.04mA
Dimensions	0.74 x 1.87 x 0.37 inches (18.9 x 47.5 x 9.30 mm)
Weight	1.83 ounces (52 g)

Troubleshooting

The mouse is not working.

- Make sure that the polarity of the batteries is correct. The positive (+) and negative (-) ends of each battery must match the positive (+) and negative (-) connections in the battery housing.
- Check that the USB adapter is firmly attached to the USB port on your computer.
- Verify that the device drivers are installed:
 - 1 Click **Start/Settings/Control Panel/System/Hardware/Device Manager**.
 - 2 Check under 'Bluetooth Devices' that a 'Targus Bluetooth Mini Mouse' is installed.

I cannot connect to a paired device.

- Paired devices are always displayed in My Bluetooth Places, even if the remote device is out of range or not powered up.
- Verify that the remote member of the pair is within radio range, and powered up, and then attempt the connection again.

I cannot discover services on an un-paired remote device.

- The remote device may not be powered up or may be out of range.
- Verify that the remote device is powered up.
- Verify that the remote device is in Connectable mode (Bluetooth Configuration Panel > Accessibility tab).

- Perform a Search for Devices to verify that the device is within range.



NOTE: FOR A COMPLETE USER'S GUIDE, PLEASE REFER TO THE WIDCOMM MANUAL LOCATED ON THE CD-ROM INCLUDED IN THIS PACKAGE.

Technical Support

For technical questions, please visit:

US

Internet: <http://www.targus.com/support>

Australia

Internet: www.targus.com.au

Email: infoaust@targus.com

Telephone: 1800-641-645

New Zealand

Telephone: 0800-633-222

Product Registration

Targus recommends that you register your Targus accessory shortly after purchasing it. To register your Targus accessory, go to:

<http://www.targus.com/registration.asp>

You will need to provide your full name, email address, phone number, and company information (if applicable).

Warranty

Targus warrants this product to be free from defects in materials and workmanship for one year. If your Targus accessory is found to be defective within that time, we will promptly repair or replace it. This

warranty does not cover accidental damage, wear and tear, or consequential or incidental loss. Under no conditions is Targus liable for loss of, or damage to a computer; nor loss of, or damage to, programs, records, or data; nor any consequential or incidental damages, even if Targus has been informed of their possibility. This warranty does not affect your statutory rights.

Product Registration at: <http://www.targus.com/registration.asp>

Regulatory Compliance

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation.

FCC Statement

Tested to Comply

This equipment has been tested and found to comply with the limits of a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna
- Increase the separation between the equipment and receiver
- Move the computer away from the receiver
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

WIDCOMM and the WIDCOMM logo are trademarks of WIDCOMM, Inc. Bluetooth and the Bluetooth logos are trademarks owned by Bluetooth SIG, Inc., U.S.A. and licensed to WIDCOMM, Inc. Microsoft, Windows, Outlook are registered trademarks of Microsoft Corporation. All other trademarks are the property of their respective owners.