

Targus

USB-C DISPLAYPORT ALT MODE DOCKING STATION WITH 85W POWER PD

27cm



QUICK START GUIDE


410-3897-001A / DOCK430USZ

Contents


- USB-C DisplayPort Alt Mode Docking Station with 85W Power PD
- USB-C cable
- AC Power adapter

Workstation Setup

1. Connect all peripheral devices to the docking station



2. Connect the Targus Docking Station to your host device.

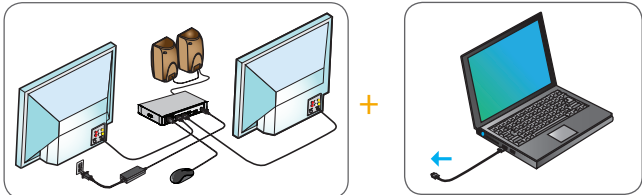


Specifications

- Display mode supporting, (i) DP++ (ii) DP++ (iii) HDMI
- 1x USB-C upstream port (Supports Power Delivery 3.0 up to 85W max)
- 4 x USB 3.2 Gen 1 downstream ports (port marked with supports BC 1.2 and iOS device charging at 2.4A max)
- 1x USB-C downstream port (USB 3.2 Gen 2, Data only)
- Gigabit Ethernet
- Combo Audio (3.5mm headset connector)
- Security lock slot
- USB-C cable
- 150W AC power adapter



Features and specifications are subject to change without notice. Microsoft and Windows are registered trademarks of Microsoft Corporation in the United States and/or other countries. All trademarks and registered trademarks are the property of their respective owners. ©2019 Targus, 1211 North Miller Street, Anaheim, CA 92806

Docking Station Diagram

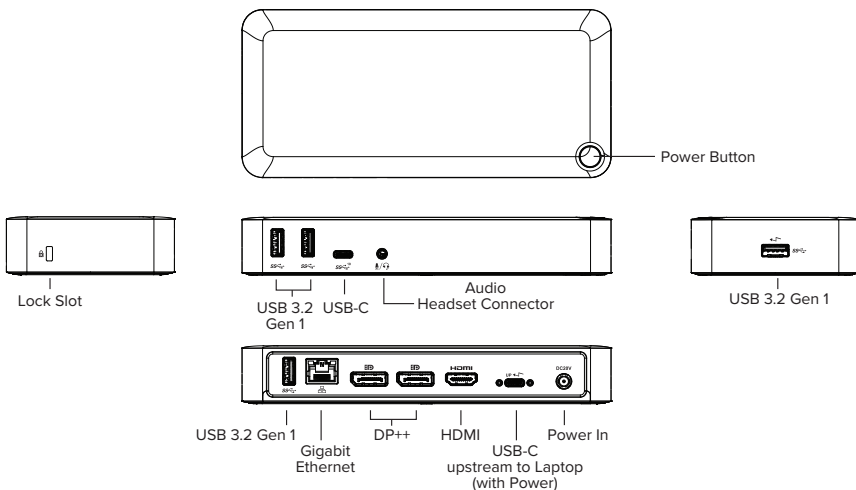

Monitor & Resolution

	Host Graphic	DP++	DP++	HDMI
Single Video (choose any one output)	DP 1.2	3840 x 2160 p30	3840 x 2160 p30	3840 x 2160 p30
	DP 1.4	3840 x 2160 p60	3840 x 2160 p60	3840 x 2160 p60
Dual Video * (choose any two outputs)	DP 1.2	1920 x 1080 p60	1920 x 1080 p60	1920 x 1080 p60
	DP 1.4	2560 x 1440 p60	2560 x 1440 p60	2560 x 1440 p60
Tri Video * # (use all outputs)	DP 1.2	1920 x 1080 p30	1920 x 1080 p30	1920 x 1080 p30
	DP 1.4	1920 x 1080 p60	1920 x 1080 p60	1920 x 1080 p60

* Requires host graphic adapter supporting Multi-Stream Transport (MST) Mode; Mac laptops do not support MST Mode
Some graphic adapter requires laptop monitor turned off to enable tri monitor display mode.

System Requirements

Hardware

- USB-C enabled laptop with supporting DisplayPort Alternative Mode and Power Delivery 3.0 or higher
- Remarks:** Graphic adapter supporting Multi-Stream Transport (MST) Mode is required for dual or tri monitor display mode


Operating System (any of the following)

- Microsoft Windows® 10 (32/64-bit)
- Mac OS® X v10.14 or later
- Chromebook

Visit www.targus.com for a list of the latest compatible operating systems

Windows Setup

To ensure the best Windows performance, please be sure to update your host PC BIOS (Firmware), display adapter driver. Using the Windows Control Panel Display Screen Resolution window, the connected monitors can be configured to either mirror your main screen, or extend the Windows desktop allowing visibility of more applications at the same time.

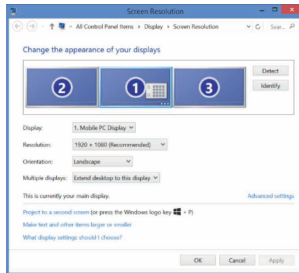

Screen Resolution window allows full configuration of all displays monitors, including:

- Display orientation and location modification
- Layout of displays

Remarks:

1. Dual/tri monitor display mode requires host graphic adapter supporting Multi-Stream Transport (MST) Mode
2. Some graphic adapter requires laptop monitor turned off to enable tri monitor display mode.


OS-X Setup

Macbook users can use the System Preferences for Displays to adjust the external monitors. OS-X allows configuration of all displays, including:

- Display orientation and location modification
- Layout of displays

Remarks

Dual / Tri display mode is not supported in Mac OS

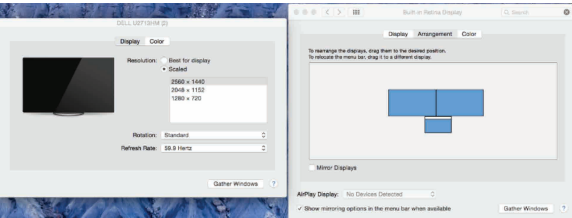

Technical Support

For technical questions, please visit:

US Internet: <http://targus.com/us/support>
Australia Internet: <http://www.targus.com/au/support>
Email: infoaust@targus.com
Telephone: 1800-641-645
New Zealand Telephone: 0800-633-222
Latin America Email: soporte@targus.com

Product Registration

Targus recommends that you register your Targus accessory shortly after purchasing it. Go to: http://targus.com/us/product_registration

You will need to provide your full name, email address, country of residence and product information.

Regulatory Compliance

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operations.

FCC Statement (Tested to Comply)

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: This device may not cause harmful interference, and This device must accept any interference received, including interference that may cause undesired operation.

Warning: Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Declaration of Conformity

Hereby, Targus declares that this device is in compliance with the essential requirements and other relevant provisions of Directive: 2014/30/EU and 2014/35/EU.

Three Year Warranty

We pride ourselves on the quality of our products. For complete warranty details and a list of our worldwide offices, please visit www.targus.com. Targus product warranty does not cover any device or product that is not manufactured by Targus (including, but not limited to, laptops, smartphones, devices, or any other product that may be used in connection with the Targus product). Australian customers: For complete warranty details see warranty statement enclosed.

Targus is a registered trademark of Targus International LLC in the U.S. and in certain other countries. Microsoft, Windows, and Windows Vista are registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries. Broadcom and the Broadcom logo are trademarks of Broadcom Corp. Bluetooth and the Bluetooth logos are trademarks owned by Bluetooth SIG, Inc., U.S.A. and licensed to Broadcom Corp. All logos and registered trademarks are the property of their respective owners. ©2019 Targus, 1211 North Miller Street, Anaheim, CA 92806. All rights reserved.

AUSTRALIAN AND NEW ZEALAND CONSUMERS ONLY

Thank you for your purchase. Targus warrants to the original purchaser that its products are free from defects in materials and workmanship, during the specified warranty period, and lasts as long as the original purchaser owns the product. The warranty period is stated on the packaging or in the documentation provided with this Targus product. Targus' Limited Product Warranty excludes damage caused by accident, neglect, abuse, misuse, improper care, normal wear and tear, ownership transfer, or alteration. The limited warranty also excludes any product that is not manufactured by Targus (including, without limitation, laptops, smartphones, devices, tablets, or any other non-Targus item) that is used in connection with the Targus product.

In the event that the Targus product has a defect in materials or workmanship Targus will, after receiving a warranty claim and inspecting the product, at its discretion, do one of the following: repair, replace, or refund with the same or a similar product (or part) of no lesser quality and ship it to the original purchaser at Targus' expense. As part of this inspection, proof of purchase will be required. There is no charge for inspection. To make a warranty claim, please contact Targus Australia or New Zealand (see details below), or return the product to the place of purchase. The original purchaser must bear the cost of the delivery to Targus.

Under Australian and/or New Zealand Consumer Laws, in addition to any warranty Targus gives, our products come with guarantees that cannot be excluded. You are entitled to a replacement or refund for a major failure and compensation for any other reasonably foreseeable loss or damage. You are entitled to have the products repaired or replaced if they fail to be of acceptable quality and the failure does not amount to a major failure.

For any warranty question, contact Targus Australia Pty. Ltd. (i) by mail at Suite 2, Level 8, 5 Rider Boulevard, Rhodes NSW 2138, by phone AUS 1800 641 645 or NZ 0800 633 222 or by Email: infoaust@targus.com. For additional information, check out our website at targus.com/au/warranty.